



**flowBOOST 2 dual**

**1200 V / 200 A**

**Topology features**

- Auxiliary diodes for FC pre-charge (patent pending)
- Dual Flying Cap Booster
- Kelvin Emitter for improved switching performance
- Temperature sensor

**Component features**

- High speed switching
- Low collector emitter saturation voltage
- Low turn-off losses
- Optimized for hard switching topologies
- Positive temperature coefficient

**Housing features**

- Base isolation: Al<sub>2</sub>O<sub>3</sub>
- Convex shaped baseplate for superior thermal contact
- Cu baseplate
- Thermo-mechanical push-and-pull force relief
- Press-fit pin
- Reliable cold welding connection

**Target applications**

- Solar Inverters


**Types**

- 30-PT12B2A200H704-PK89L03T

**flow 2 13 mm housing**



**Schematic**

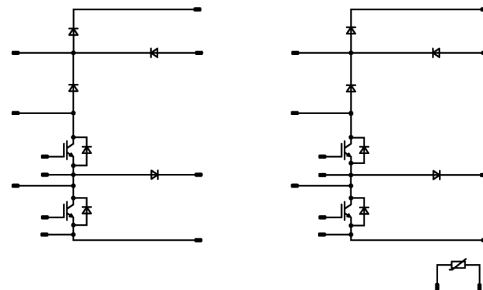



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Inner Boost Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	156	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	600	A
Turn off safe operating area		$T_j = 150\text{ °C}$ , $V_{CE} = 1200\text{ V}$	600	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	287	W
Gate-emitter voltage	$V_{GES}$		$\pm 20$	V
Maximum junction temperature	$T_{jmax}$		175	°C

## Inner Boost Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	114	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	200	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$	800	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	234	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Inner Boost Sw. Protection Diode

Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	78	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	480	A
Surge current capability	$I^2t$		1100	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	92	W
Maximum junction temperature	$T_{jmax}$		150	°C



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Outer Boost Switch</b>				
Collector-emitter voltage	$V_{CES}$		1200	V
Collector current (DC current)	$I_C$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	156	A
Repetitive peak collector current	$I_{CRM}$	$t_p$ limited by $T_{jmax}$	600	A
Turn off safe operating area		$T_j = 150\text{ °C}$ , $V_{CE} = 1200\text{ V}$	600	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	287	W
Gate-emitter voltage	$V_{GES}$		$\pm 20$	V
Maximum junction temperature	$T_{jmax}$		175	°C

## Outer Boost Diode

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	114	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	200	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$	800	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	234	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Outer Boost Sw. Protection Diode

Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	78	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	480	A
Surge current capability	$I^2t$		1100	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	92	W
Maximum junction temperature	$T_{jmax}$		150	°C



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Aux Diode H</b>				
Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	74	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	150	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$	600	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	145	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Aux Diode L

Peak repetitive reverse voltage	$V_{RRM}$		1200	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	74	A
Repetitive peak forward current	$I_{FRM}$	$t_p$ limited by $T_{jmax}$	150	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 25\text{ °C}$	600	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	145	W
Maximum junction temperature	$T_{jmax}$		175	°C

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	°C

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6800	V
Creepage distance			>12,7	mm
Clearance			>12,7	mm
Comparative Tracking Index	CTI		≥ 600	

\*100 % tested in production



Vincotech

30-PT12B2A200H704-PK89L03T  
datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### Inner Boost Switch

##### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0032	25	4,7	5,5	6,2	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		200	25 125 150		1,78 1,94 1,98	2,15 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			8	μA
Gate-emitter leakage current	$I_{GES}$		20	0		25			200	nA
Internal gate resistance	$r_g$							None		Ω
Input capacitance	$C_{ies}$							26000		pF
Output capacitance	$C_{oes}$	$f = 100$ kHz	0	25		25		480		pF
Reverse transfer capacitance	$C_{res}$							144		pF
Gate charge	$Q_g$	$V_{CC} = 960$ V	0/15		200	25		1428		nC

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,33		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

##### Dynamic

Turn-on delay time	$t_{d(on)}$					25 125 150		1140,88 1126,71 1123,3		ns
Rise time	$t_r$					25 125 150		73,55 68,72 68,04		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		864,57 912,32 925,27		ns
Fall time	$t_f$					25 125 150		19,32 53,25 63,69		ns
Turn-on energy (per pulse)	$E_{on}$	$Q_{tFWD} = 0,268$ μC $Q_{tFWD} = 0,301$ μC $Q_{tFWD} = 0,276$ μC				25 125 150		17,67 14,88 14,05		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		6,03 9,8 10,79		mWs



Vincotech

**30-PT12B2A200H704-PK89L03T**  
datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		
<b>Inner Boost Diode</b>										
<b>Static</b>										
Forward voltage	$V_F$				100	25 125 150		1,42 1,73 1,84	1,65 <sup>(1)</sup> 2,3 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25		5	500	μA
<b>Thermal</b>										
Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,41		K/W
<b>Dynamic</b>										
Peak recovery current	$I_{RM}$					25 125 150		25,45 27,92 28,74		A
Reverse recovery time	$t_{rr}$					25 125 150		18,58 19,16 18,65		ns
Recovered charge	$Q_r$	$di/dt=4136$ A/μs $di/dt=10770$ A/μs $di/dt=2111$ A/μs	±15	700	200	25 125 150		0,268 0,301 0,276		μC
Reverse recovered energy	$E_{rec}$					25 125 150		0,014 0,017 0,016		mWs
Peak rate of fall of recovery current	$(di_r/dt)_{max}$					25 125 150		1548,45 2937,25 4552,73		A/μs



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### Inner Boost Sw. Protection Diode

##### Static

Forward voltage	$V_F$				40	25 125 150		1,06 0,987 0,974	1,5 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25 150			100 2000	μA

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,76		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### Outer Boost Switch

##### Static

Gate-emitter threshold voltage	$V_{GE(th)}$	$V_{CE} = V_{GE}$			0,0032	25	4,7	5,5	6,2	V
Collector-emitter saturation voltage	$V_{CE(sat)}$		15		200	25 125 150		1,78 1,94 1,98	2,15 <sup>(1)</sup>	V
Collector-emitter cut-off current	$I_{CES}$		0	1200		25			8	μA
Gate-emitter leakage current	$I_{GES}$		20	0		25			200	nA
Internal gate resistance	$r_g$							None		Ω
Input capacitance	$C_{ies}$							26000		pF
Output capacitance	$C_{oes}$	$f = 100$ kHz	0	25		25		480		pF
Reverse transfer capacitance	$C_{res}$							144		pF
Gate charge	$Q_g$	$V_{CC} = 960$ V	0/15		200	25		1428		nC

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,33		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

##### Dynamic

Turn-on delay time	$t_{d(on)}$					25 125 150		1131,73 1119,22 1115,5		ns
Rise time	$t_r$	$R_{gon} = 16$ Ω $R_{goff} = 16$ Ω				25 125 150		61,42 57,9 57,91		ns
Turn-off delay time	$t_{d(off)}$		±15	700	200	25 125 150		862,07 910,63 923,92		ns
Fall time	$t_f$					25 125 150		15,96 68,37 81,24		ns
Turn-on energy (per pulse)	$E_{on}$	$Q_{tFWD} = 0,378$ μC $Q_{tFWD} = 0,43$ μC $Q_{tFWD} = 0,428$ μC				25 125 150		14,55 12,57 11,71		mWs
Turn-off energy (per pulse)	$E_{off}$					25 125 150		5,8 9,99 11,2		mWs





Vincotech

30-PT12B2A200H704-PK89L03T  
datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		
<b>Outer Boost Diode</b>										
<b>Static</b>										
Forward voltage	$V_F$				100	25 125 150		1,42 1,73 1,84	1,65 <sup>(1)</sup> 2,3 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25		5	500	μA
<b>Thermal</b>										
Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,41		K/W
<b>Dynamic</b>										
Peak recovery current	$I_{RM}$					25 125 150		35,14 39,79 41,81		A
Reverse recovery time	$t_{rr}$					25 125 150		19,7 18,78 18,86		ns
Recovered charge	$Q_r$	$di/dt=3352$ A/μs $di/dt=2745$ A/μs $di/dt=2613$ A/μs	±15	700	200	25 125 150		0,378 0,43 0,428		μC
Reverse recovered energy	$E_{rec}$					25 125 150		0,031 0,043 0,046		mWs
Peak rate of fall of recovery current	$(di_r/dt)_{max}$					25 125 150		4614,39 6679,58 6294,98		A/μs



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

#### Outer Boost Sw. Protection Diode

##### Static

Forward voltage	$V_F$				40	25 125 150		1,06 0,987 0,974	1,5 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25 150			100 2000	μA

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,76		K/W
--	---------------	------------------------------------	--	--	--	--	--	------	--	-----

#### Aux Diode H

##### Static

Forward voltage	$V_F$				75	25 125 150		2,59 2,16 2,07	3,3 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25 150			250 2000	μA

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,66		K/W
--	---------------	------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
		$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max			

#### Aux Diode L

##### Static

Parameter	Symbol	Conditions	$V_{GE}$ [V]	$V_{CE}$ [V]	$I_C$ [A]	$T_j$ [°C]	Min	Typ	Max	Unit
Forward voltage	$V_F$				75	25 125 150		2,59 2,16 2,07	3,3 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1200$ V				25 150			250 2000	μA

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,66		K/W
--	---------------	------------------------------------	--	--	--	--	--	------	--	-----

#### Thermistor

##### Static

Rated resistance	$R$					25		22		kΩ
Deviation of R100	$\Delta_{R/R}$	$R_{100} = 1484$ Ω				100	-5		5	%
Power dissipation	$P$					25		130		mW
Power dissipation constant	$d$					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. ±1 %						3962		K
B-value	$B_{(25/100)}$	Tol. ±1 %						4000		K
Vincotech Thermistor Reference									I	

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.




## Inner Boost Switch Characteristics

**figure 1.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

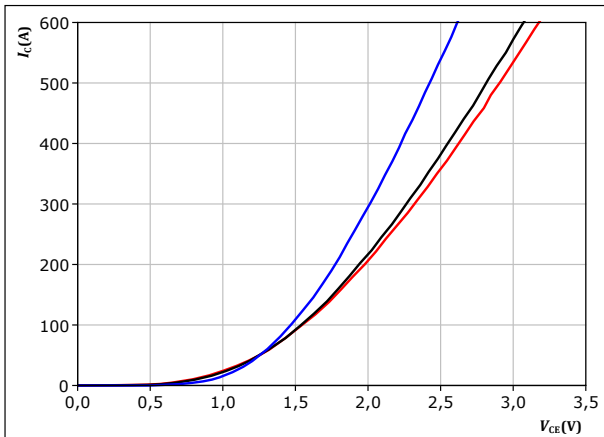


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$

$T_j$ : 25 °C  
125 °C  
150 °C

**figure 2.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

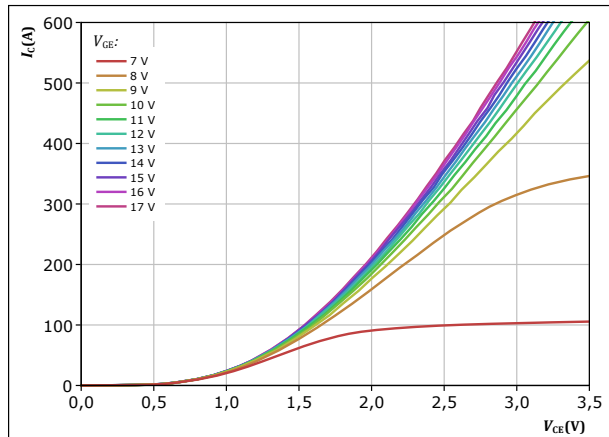


$t_p = 250 \mu s$   
 $T_j = 150 \text{ °C}$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**figure 3.** IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

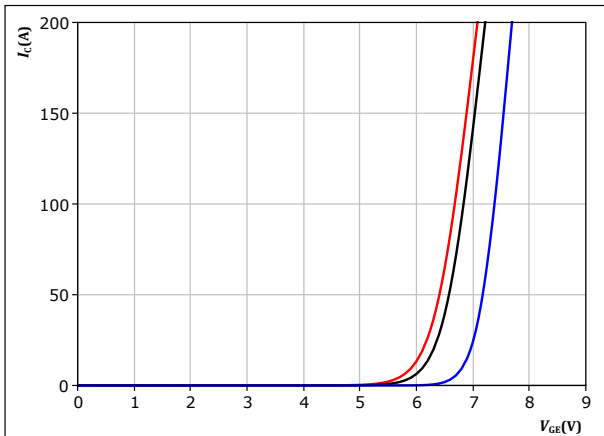


$t_p = 250 \mu s$   
 $V_{CE} = 48 V$

$T_j$ : 25 °C  
125 °C  
150 °C

**figure 4.** IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

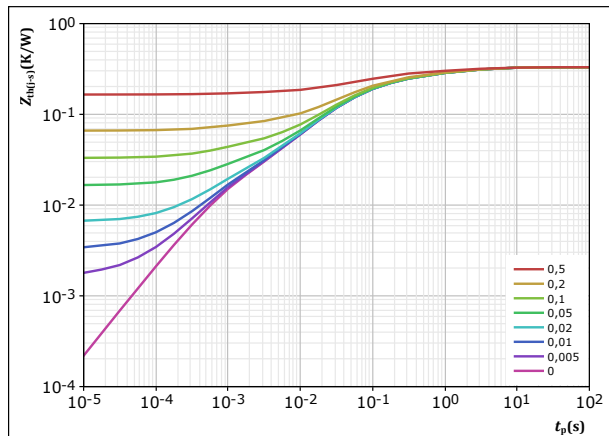

$D = t_p / T$   
 $R_{th(j-s)} = 0,331 \text{ K/W}$

IGBT thermal model values


$R$ (K/W)	$\tau$ (s)
3,72E-02	4,28E+00
7,68E-02	6,09E-01
1,42E-01	7,68E-02
6,11E-02	1,66E-02
1,38E-02	8,44E-04



### Inner Boost Switch Characteristics

figure 5. IGBT


Safe operating area  
 $I_C = f(V_{CE})$

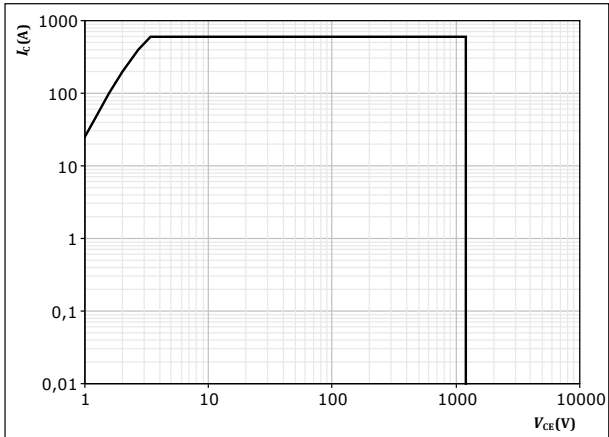

$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GE} = 15$  V  
 $T_j = T_{jmax}$

figure 6. IGBT

Gate voltage vs gate charge  
 $V_{GE} = f(Q_g)$

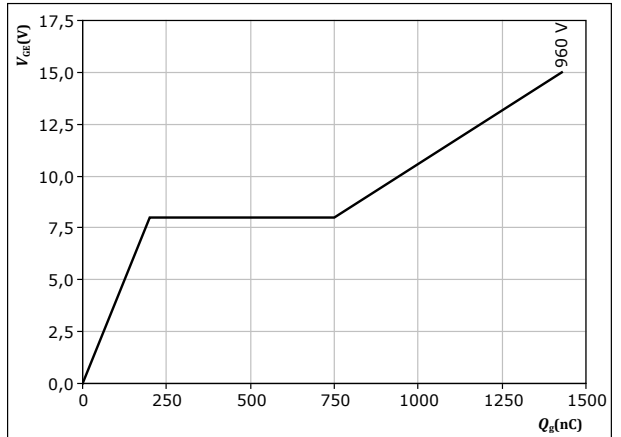

$I_C = 200$  A  
 $T_j = 25$  °C



## Inner Boost Diode Characteristics

figure 7. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


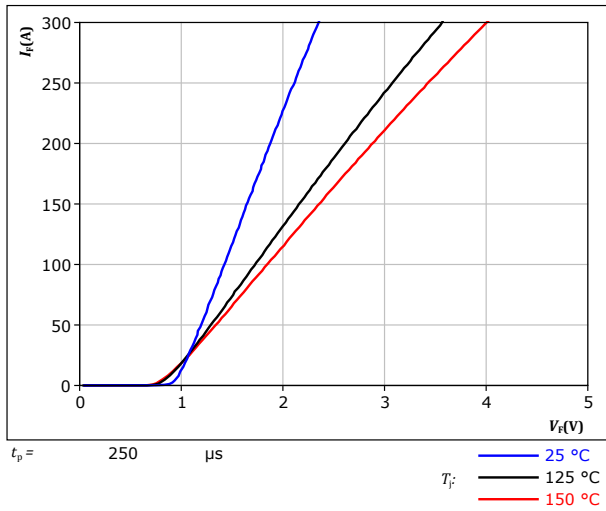


figure 8. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

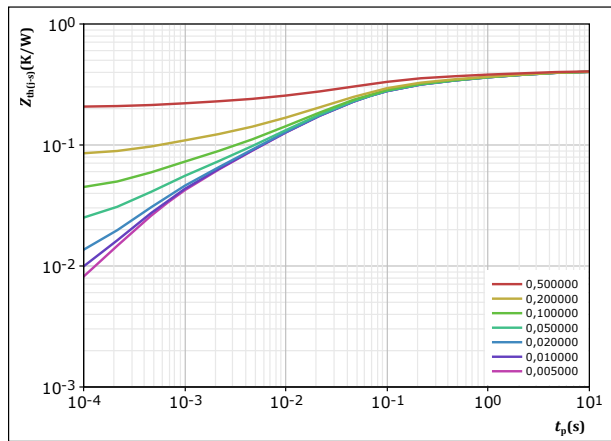

$D = \frac{t_p}{T}$   
 $R_{th(j-s)} = 0,405 \text{ K/W}$   
 FWD thermal model values

$R$ (K/W)	$\tau$ (s)
1,72E-02	1,61E+01
5,46E-02	1,79E+00
5,92E-02	2,84E-01
1,42E-01	5,45E-02
7,40E-02	1,41E-02
3,56E-02	3,31E-03
2,91E-02	5,40E-04



## Inner Boost Sw. Protection Diode Characteristics

figure 9. Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


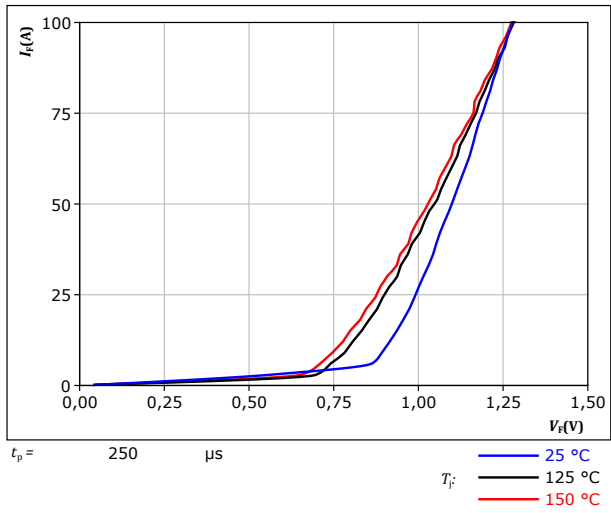


figure 10. Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

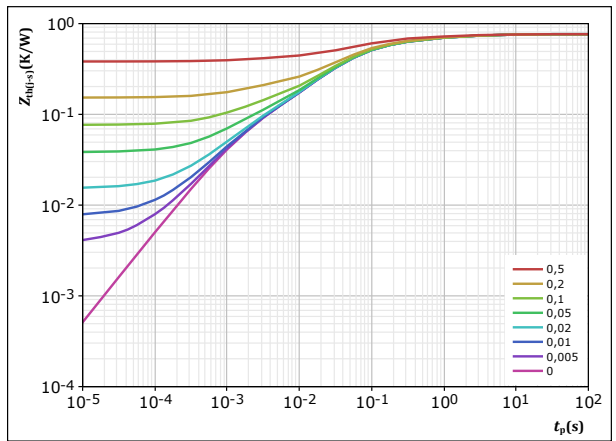

$D = \frac{t_p}{T}$   
 $R_{th(j-s)} = 0,765 \text{ K/W}$

Rectifier thermal model values

R (K/W)	$\tau$ (s)
4,68E-02	5,24E+00
1,43E-01	5,88E-01
3,57E-01	7,04E-02
1,61E-01	1,86E-02
5,74E-02	1,54E-03




## Outer Boost Switch Characteristics

**figure 11.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

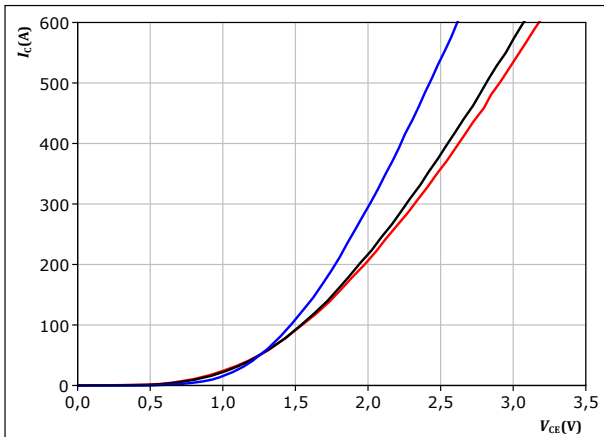


$t_p = 250 \mu s$   
 $V_{GE} = 15 V$

$T_j:$  — 25 °C  
— 125 °C  
— 150 °C

**figure 12.** IGBT

Typical output characteristics

$$I_C = f(V_{CE})$$

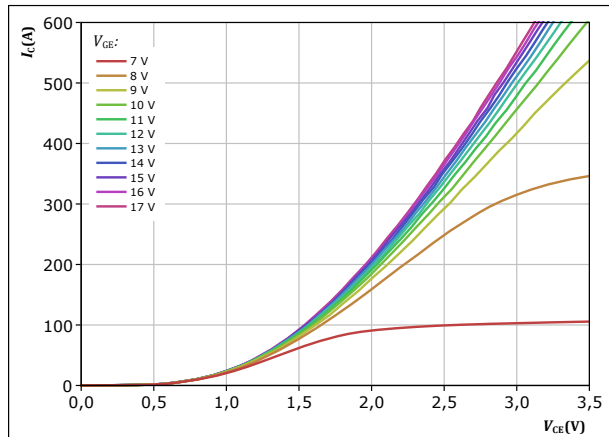


$t_p = 250 \mu s$   
 $T_j = 150 \text{ °C}$   
 $V_{GE}$  from 7 V to 17 V in steps of 1 V

**figure 13.** IGBT

Typical transfer characteristics

$$I_C = f(V_{GE})$$

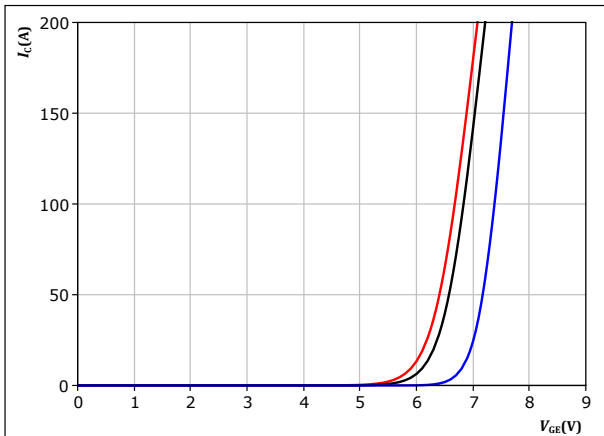


$t_p = 250 \mu s$   
 $V_{CE} = 48 V$

$T_j:$  — 25 °C  
— 125 °C  
— 150 °C

**figure 14.** IGBT

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

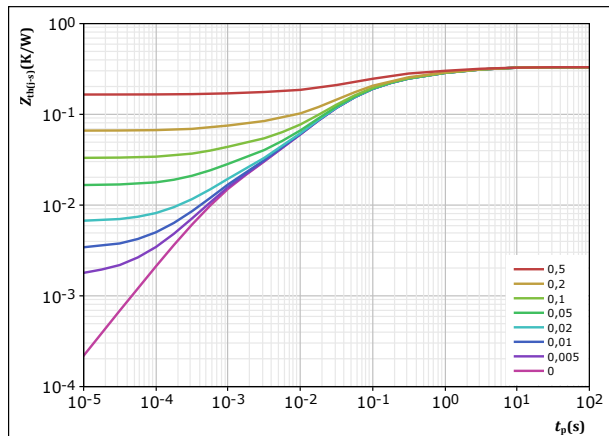

$D = t_p / T$   
 $R_{th(j-s)} = 0,331 \text{ K/W}$

IGBT thermal model values

$R$ (K/W)	$\tau$ (s)
3,72E-02	4,28E+00
7,68E-02	6,09E-01
1,42E-01	7,68E-02
6,11E-02	1,66E-02
1,38E-02	8,44E-04






### Outer Boost Switch Characteristics

figure 15. IGBT


Safe operating area  
 $I_C = f(V_{CE})$

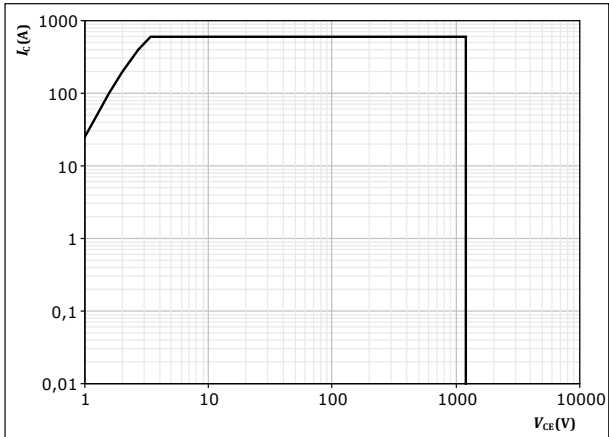

$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GE} = 15$  V  
 $T_j = T_{jmax}$

figure 16. IGBT

Gate voltage vs gate charge  
 $V_{GE} = f(Q_g)$

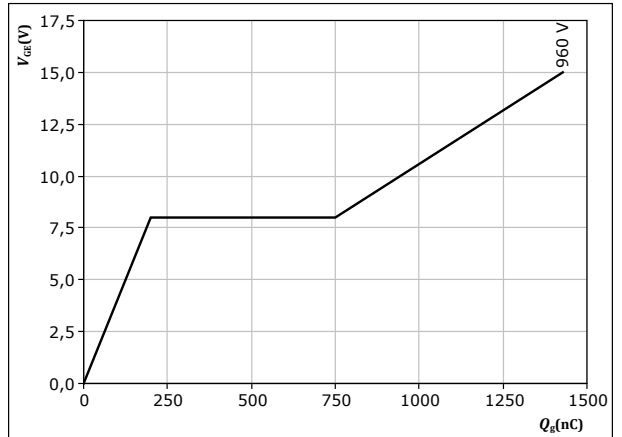

$I_C = 200$  A  
 $T_j = 25$  °C



### Outer Boost Diode Characteristics

figure 17. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


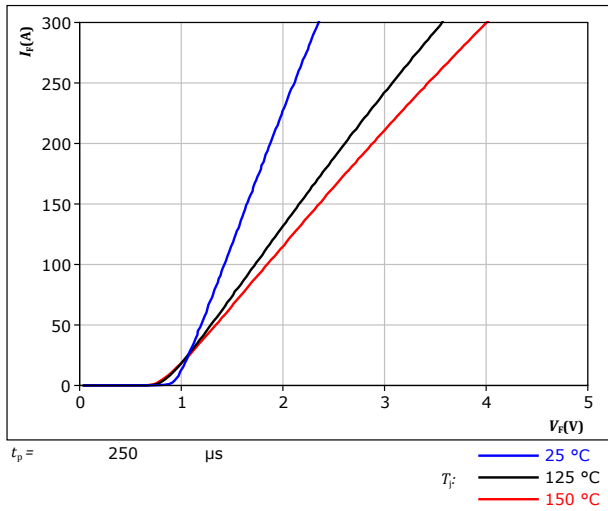


figure 18. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

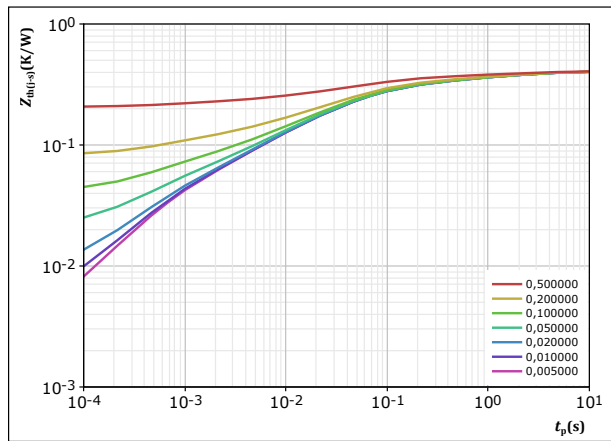

$D = \frac{t_p}{T}$   
 $R_{th(j-s)} = 0,405 \text{ K/W}$   
 FWD thermal model values

R (K/W)	$\tau$ (s)
1,72E-02	1,61E+01
5,46E-02	1,79E+00
5,92E-02	2,84E-01
1,42E-01	5,45E-02
7,40E-02	1,41E-02
3,56E-02	3,31E-03
2,91E-02	5,40E-04



## Outer Boost Sw. Protection Diode Characteristics

figure 19. Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


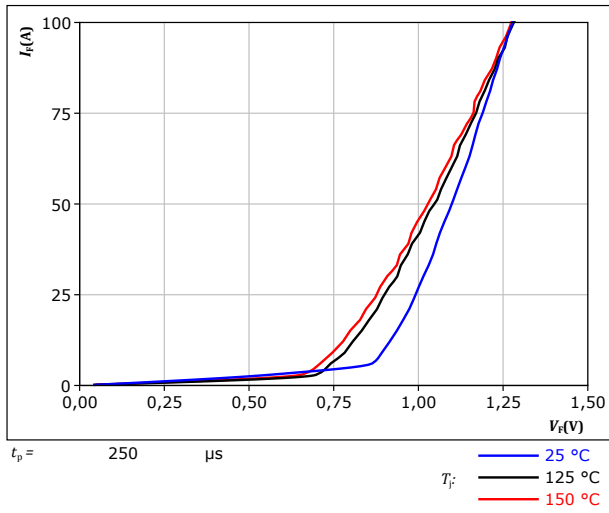


figure 20. Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

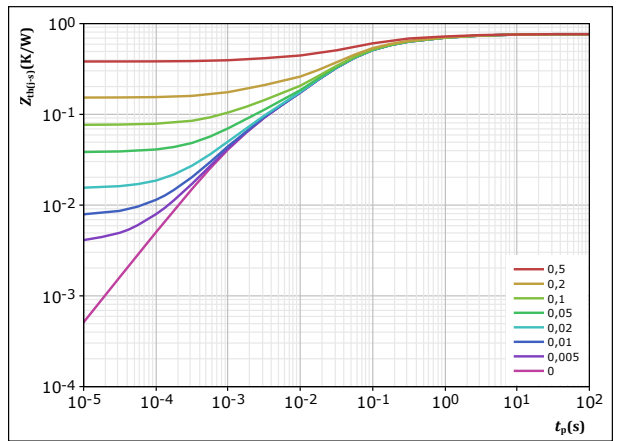

$D = t_p / T$   
 $R_{th(j-s)} = 0,765$  K/W  
 Rectifier thermal model values

R (K/W)	$\tau$ (s)
4,68E-02	5,24E+00
1,43E-01	5,88E-01
3,57E-01	7,04E-02
1,61E-01	1,86E-02
5,74E-02	1,54E-03



### Aux Diode H Characteristics

figure 21. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


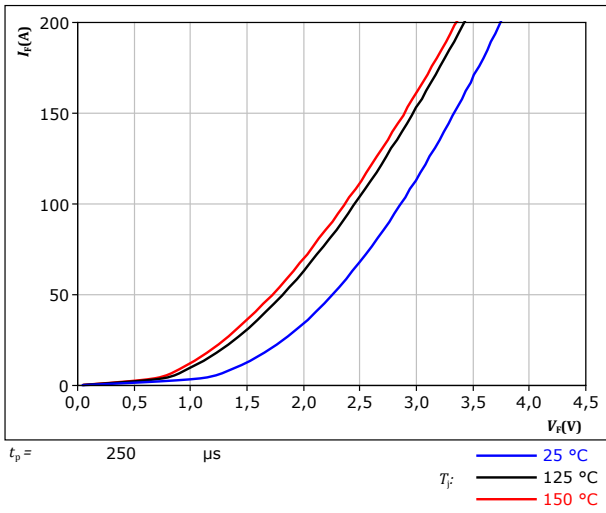


figure 22. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

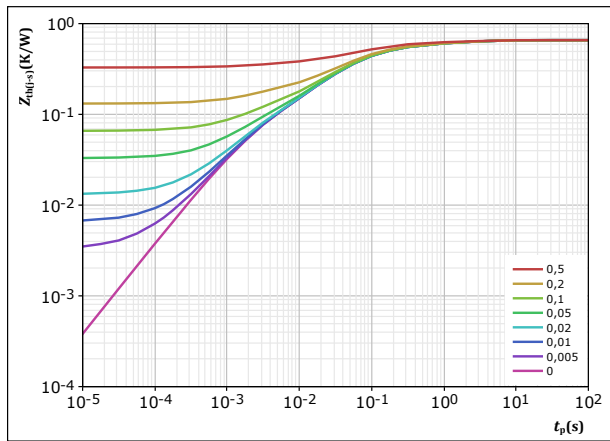

$D = \frac{t_p}{T}$   
 $R_{th(j-s)} = 0,657 \text{ K/W}$   
 FWD thermal model values

R (K/W)	$\tau$ (s)
6,51E-02	2,52E+00
1,04E-01	3,73E-01
3,01E-01	7,08E-02
1,34E-01	1,87E-02
5,30E-02	2,00E-03



### Aux Diode L Characteristics

figure 23. FWD

Typical forward characteristics

$$I_F = f(V_F)$$


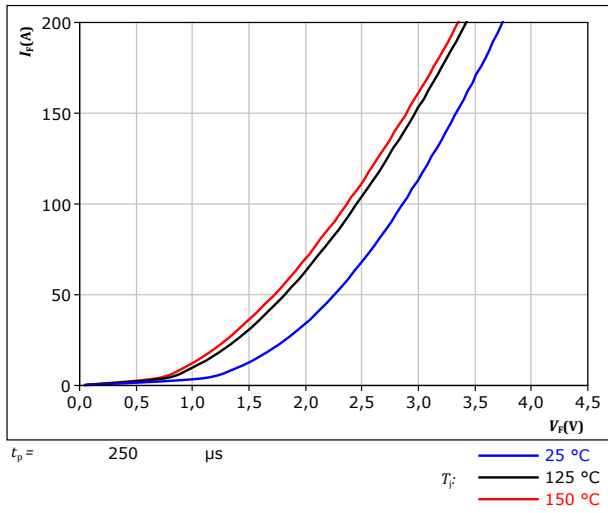


figure 24. FWD

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

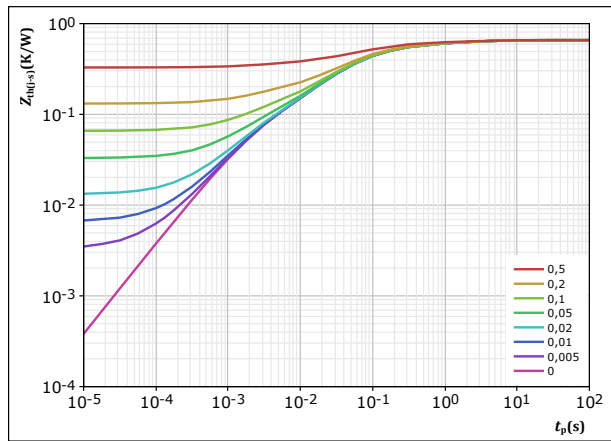

$D =$	$t_p / T$	
$R_{th(j-s)} =$	0,657	K/W
FWD thermal model values		
$R$ (K/W)	$\tau$ (s)	
6,51E-02	2,52E+00	
1,04E-01	3,73E-01	
3,01E-01	7,08E-02	
1,34E-01	1,87E-02	
5,30E-02	2,00E-03	




## Thermistor Characteristics

figure 25. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

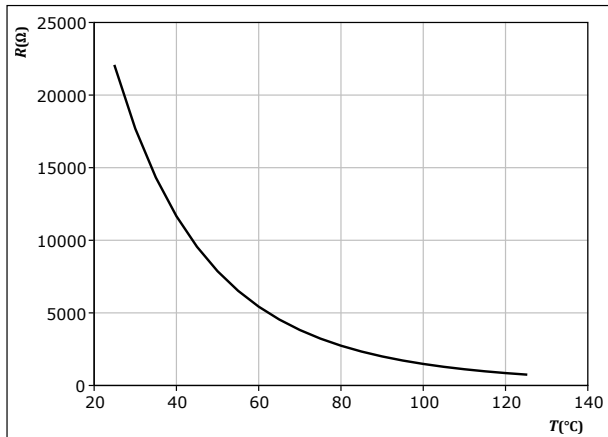




## Inner Boost Switching Characteristics

**figure 26.** IGBT

Typical switching energy losses as a function of collector current  
 $E = f(I_c)$

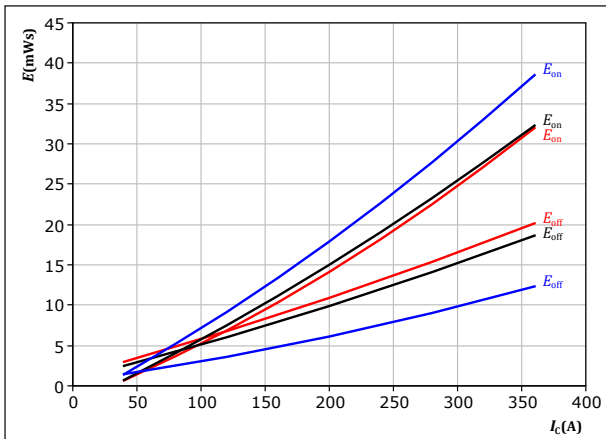


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{g(on)} = 16 \ \Omega$   
 $R_{g(off)} = 16 \ \Omega$

$T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C

**figure 27.** IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor  
 $E = f(R_g)$

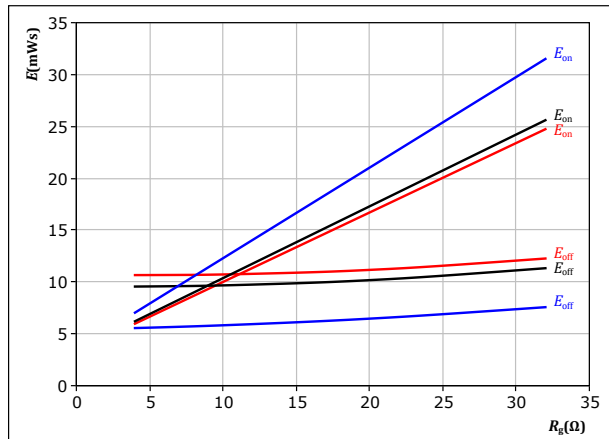


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$

$T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C

**figure 28.** FWD

Typical reverse recovered energy loss as a function of collector current  
 $E_{rec} = f(I_c)$

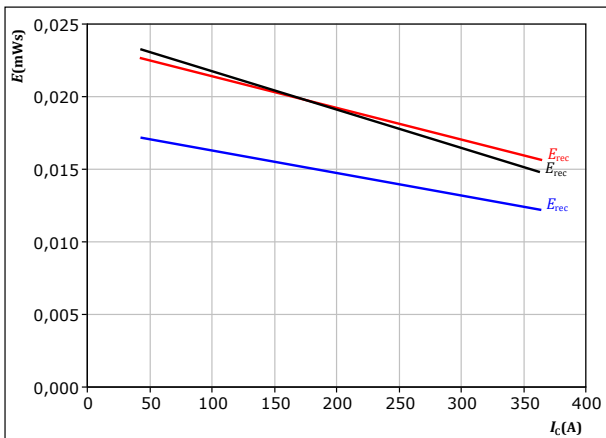


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{g(on)} = 16 \ \Omega$

$T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C

**figure 29.** FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor  
 $E_{rec} = f(R_g)$

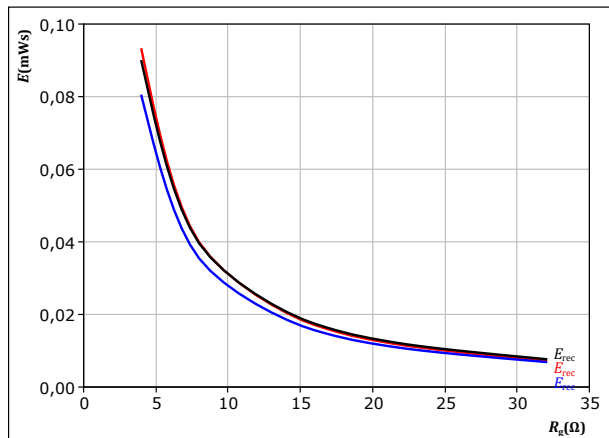

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$


$T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C



## Inner Boost Switching Characteristics

**figure 30.** IGBT


Typical switching times as a function of collector current  
 $t = f(I_c)$

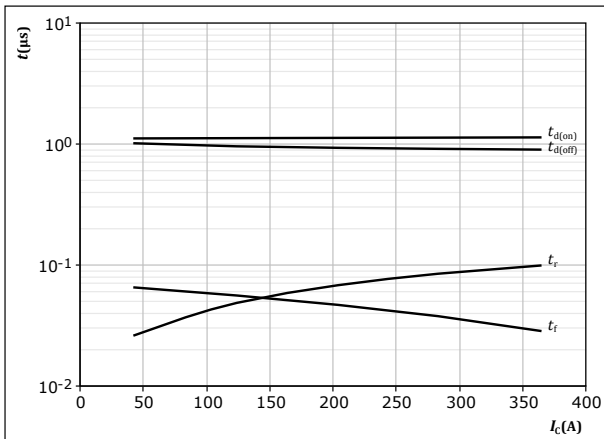

With an inductive load at  
 $T_j = 150 \text{ } ^\circ\text{C}$   
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \text{ } \Omega$   
 $R_{goff} = 16 \text{ } \Omega$

**figure 31.** IGBT


Typical switching times as a function of IGBT turn on gate resistor  
 $t = f(R_g)$

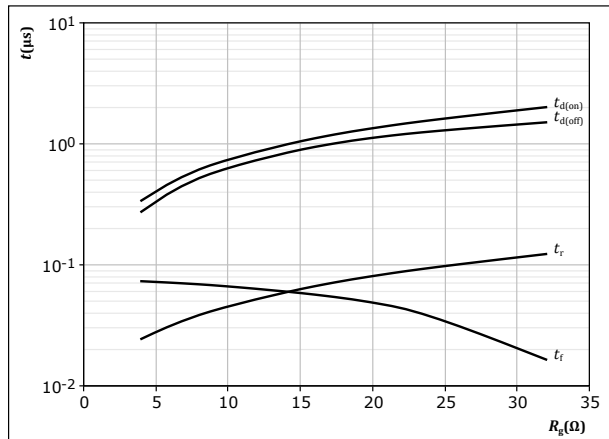

With an inductive load at  
 $T_j = 150 \text{ } ^\circ\text{C}$   
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$

**figure 32.** FWD


Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_c)$

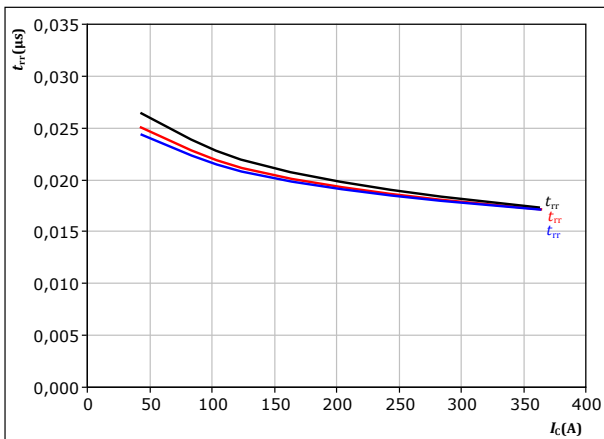

With an inductive load at  
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \text{ } \Omega$   
 $T_j: \text{ — } 25 \text{ } ^\circ\text{C}$   
 $\text{ — } 125 \text{ } ^\circ\text{C}$   
 $\text{ — } 150 \text{ } ^\circ\text{C}$

**figure 33.** FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor  
 $t_{rr} = f(R_{gon})$

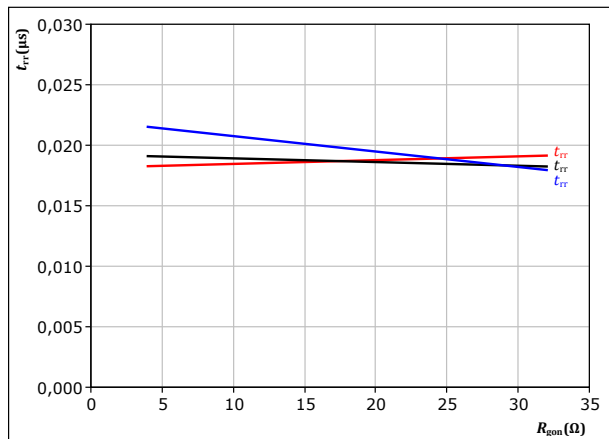

With an inductive load at  
 $V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$   
 $T_j: \text{ — } 25 \text{ } ^\circ\text{C}$   
 $\text{ — } 125 \text{ } ^\circ\text{C}$   
 $\text{ — } 150 \text{ } ^\circ\text{C}$






## Inner Boost Switching Characteristics

**figure 34.** FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

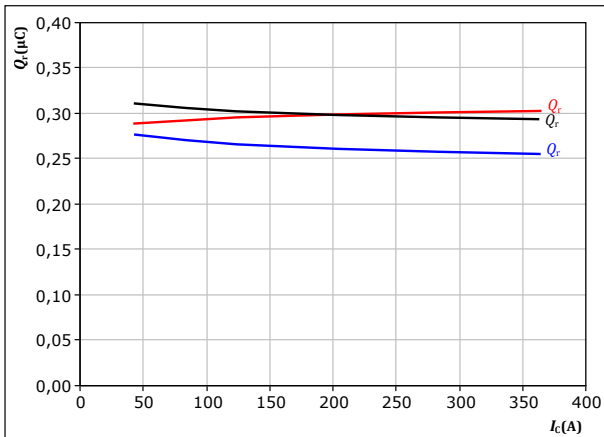

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 35.** FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

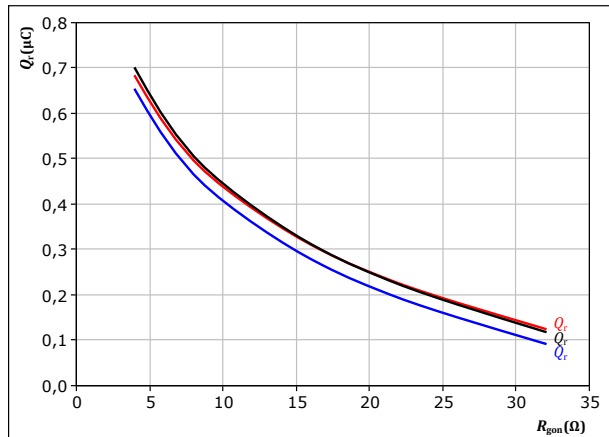

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 200$  A

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 36.** FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

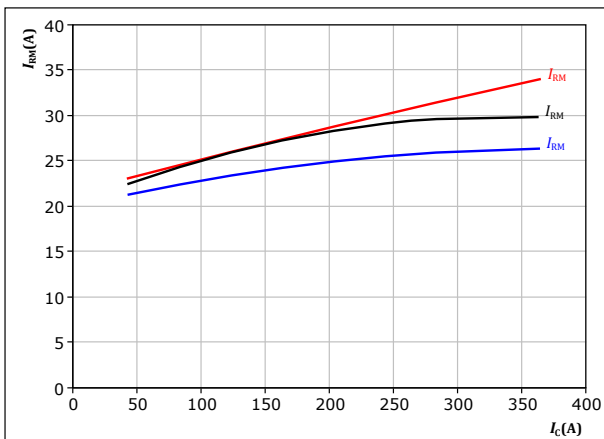

With an inductive load at


$V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$   $\Omega$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 37.** FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

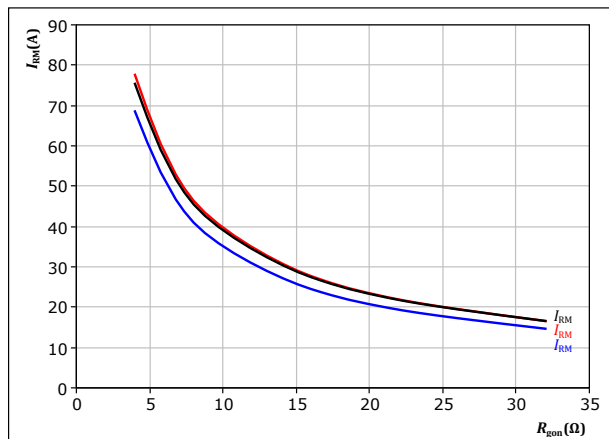

With an inductive load at

$V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 200$  A


$T_j$ : — 25 °C  
— 125 °C  
— 150 °C



## Inner Boost Switching Characteristics

**figure 38.** FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

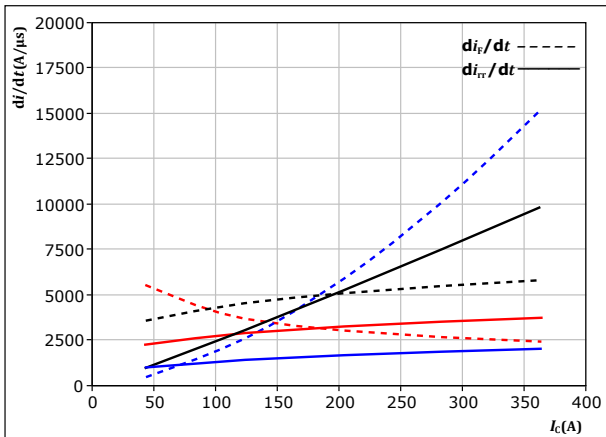


With an inductive load at

$V_{CE} = 700$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C
$R_{gon} = 16$ Ω	$T_j = 150$ °C

**figure 39.** FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor  
 $di_f/dt, di_r/dt = f(R_{gon})$

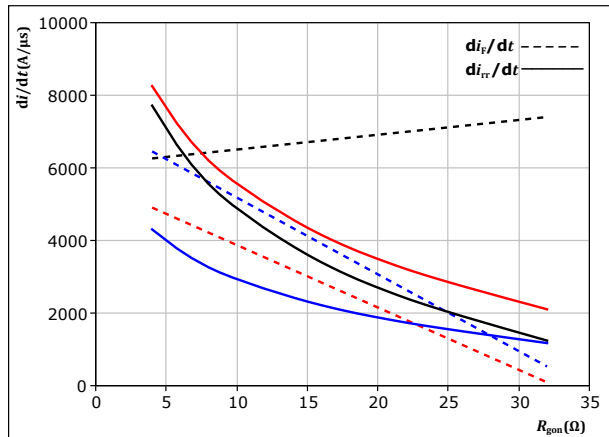


With an inductive load at

$V_{CE} = 700$ V	$T_j = 25$ °C
$V_{GE} = \pm 15$ V	$T_j = 125$ °C
$I_C = 200$ A	$T_j = 150$ °C

**figure 40.** IGBT

Reverse bias safe operating area  
 $I_C = f(V_{CE})$

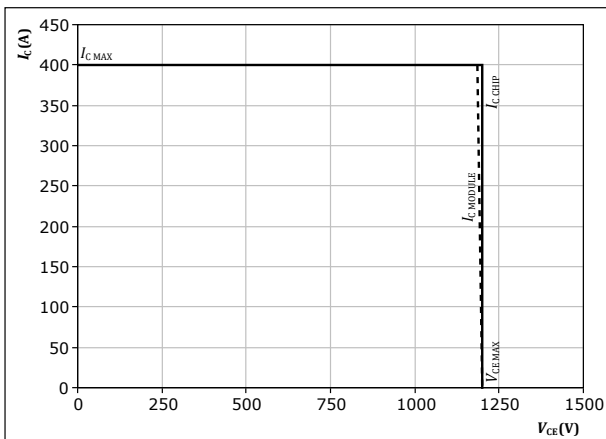


At  $T_j = 150$  °C  
 $R_{gon} = 16$  Ω  
 $R_{goff} = 16$  Ω



## Outer Boost Switching Characteristics

**figure 41.** IGBT

Typical switching energy losses as a function of collector current  
 $E = f(I_c)$

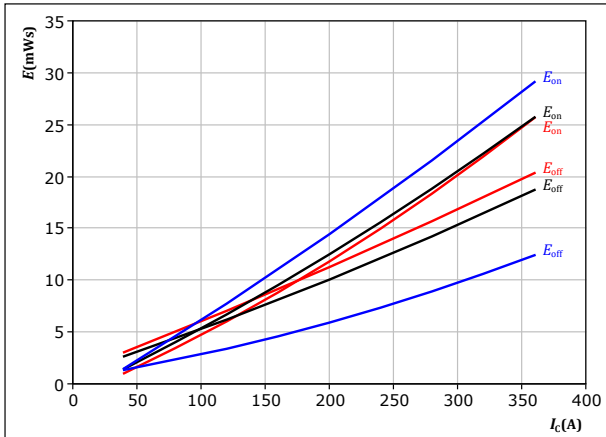


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \text{ } \Omega$   
 $R_{goff} = 16 \text{ } \Omega$

$T_j$ :  $25 \text{ }^\circ\text{C}$  (blue)  
 $125 \text{ }^\circ\text{C}$  (black)  
 $150 \text{ }^\circ\text{C}$  (red)

**figure 42.** IGBT

Typical switching energy losses as a function of IGBT turn on gate resistor  
 $E = f(R_g)$

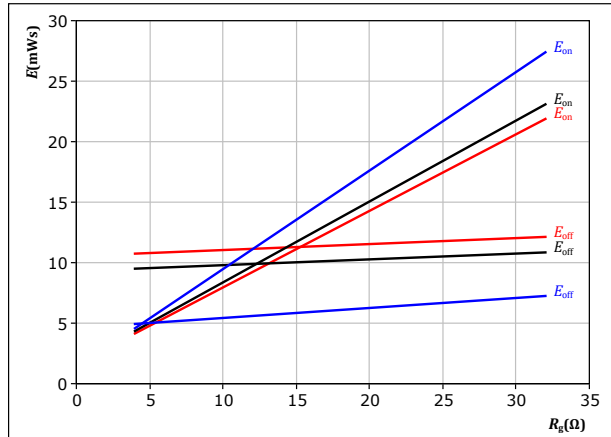


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$

$T_j$ :  $25 \text{ }^\circ\text{C}$  (blue)  
 $125 \text{ }^\circ\text{C}$  (black)  
 $150 \text{ }^\circ\text{C}$  (red)

**figure 43.** FWD

Typical reverse recovered energy loss as a function of collector current  
 $E_{rec} = f(I_c)$

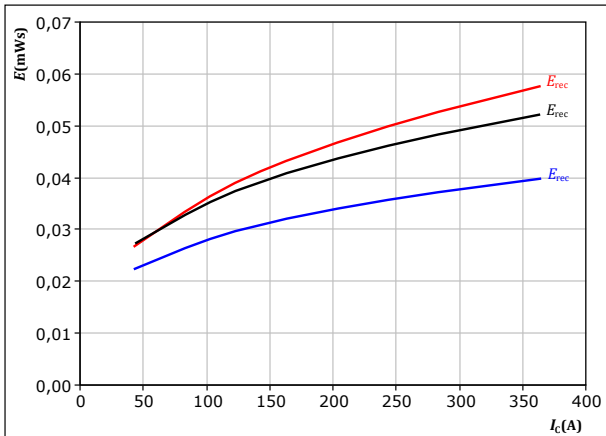


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \text{ } \Omega$

$T_j$ :  $25 \text{ }^\circ\text{C}$  (blue)  
 $125 \text{ }^\circ\text{C}$  (black)  
 $150 \text{ }^\circ\text{C}$  (red)

**figure 44.** FWD

Typical reverse recovered energy loss as a function of IGBT turn on gate resistor  
 $E_{rec} = f(R_g)$

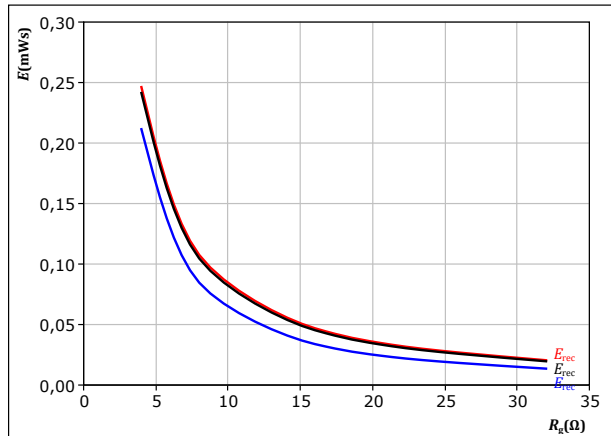

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$


$T_j$ :  $25 \text{ }^\circ\text{C}$  (blue)  
 $125 \text{ }^\circ\text{C}$  (black)  
 $150 \text{ }^\circ\text{C}$  (red)



## Outer Boost Switching Characteristics

**figure 45.** IGBT


Typical switching times as a function of collector current  
 $t = f(I_c)$

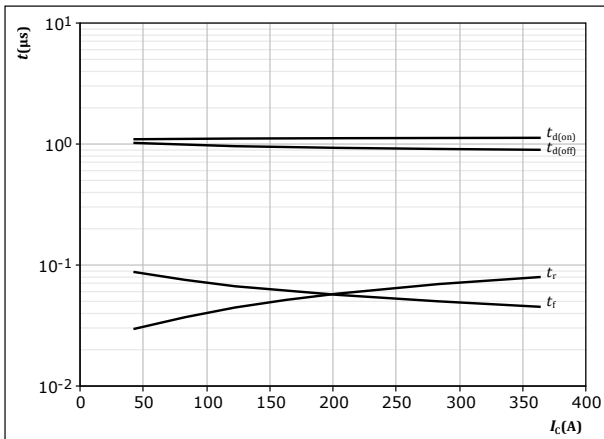

With an inductive load at  
 $T_j = 150$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$   $\Omega$   
 $R_{goff} = 16$   $\Omega$

**figure 46.** IGBT


Typical switching times as a function of IGBT turn on gate resistor  
 $t = f(R_g)$

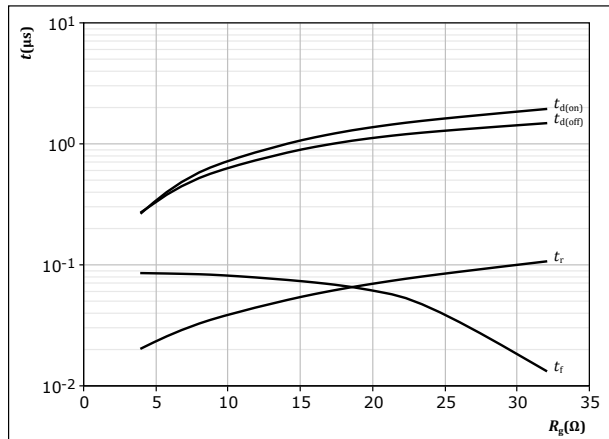

With an inductive load at  
 $T_j = 150$  °C  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 200$  A

**figure 47.** FWD


Typical reverse recovery time as a function of collector current  
 $t_{rr} = f(I_c)$

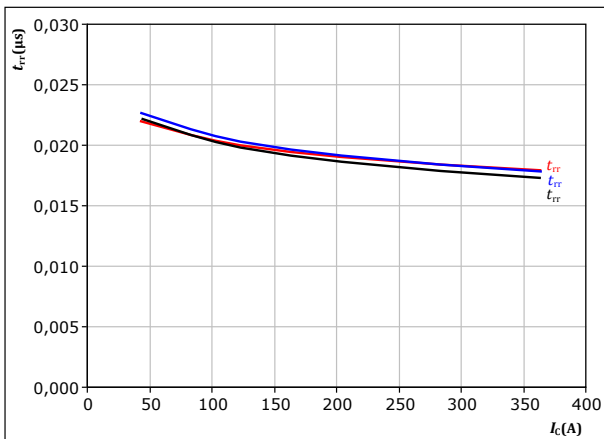

With an inductive load at  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $R_{gon} = 16$   $\Omega$   
 $T_j:$  — 25 °C  
— 125 °C  
— 150 °C

**figure 48.** FWD

Typical reverse recovery time as a function of IGBT turn on gate resistor  
 $t_{rr} = f(R_{gon})$

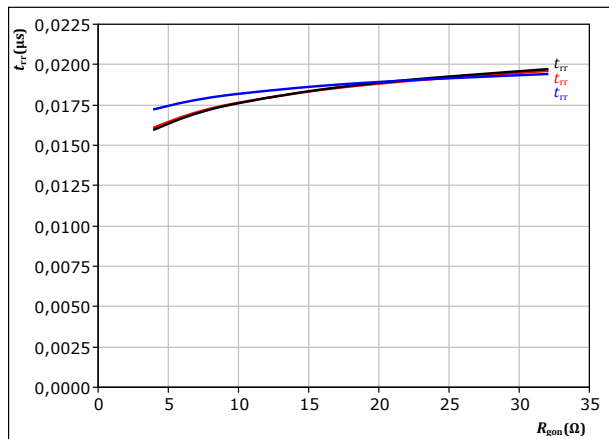

With an inductive load at  
 $V_{CE} = 700$  V  
 $V_{GE} = \pm 15$  V  
 $I_c = 200$  A  
 $T_j:$  — 25 °C  
— 125 °C  
— 150 °C




## Outer Boost Switching Characteristics

**figure 49.** FWD

Typical recovered charge as a function of collector current

$$Q_r = f(I_c)$$

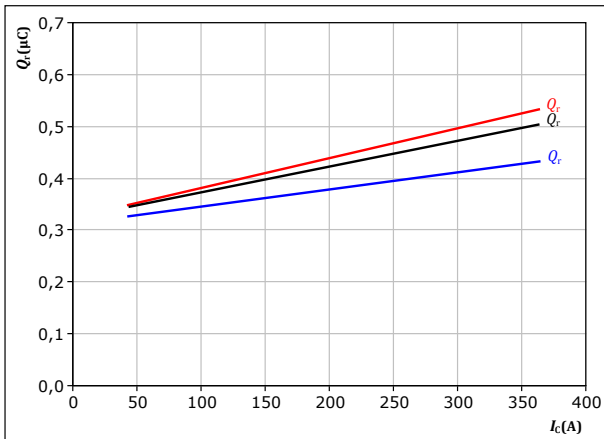

With an inductive load at


$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \ \Omega$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 50.** FWD

Typical recovered charge as a function of IGBT turn on gate resistor

$$Q_r = f(R_{gon})$$

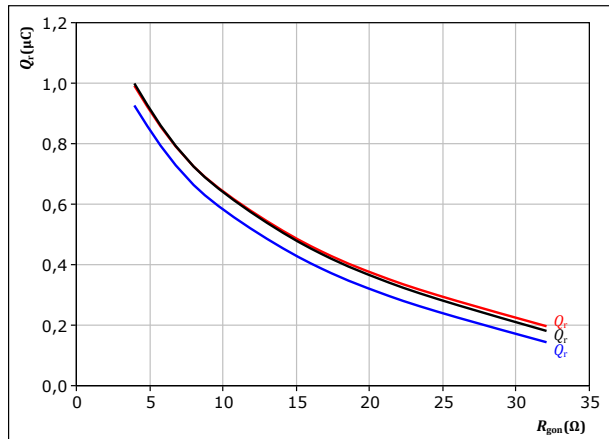

With an inductive load at


$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 51.** FWD

Typical peak reverse recovery current as a function of collector current

$$I_{RM} = f(I_c)$$

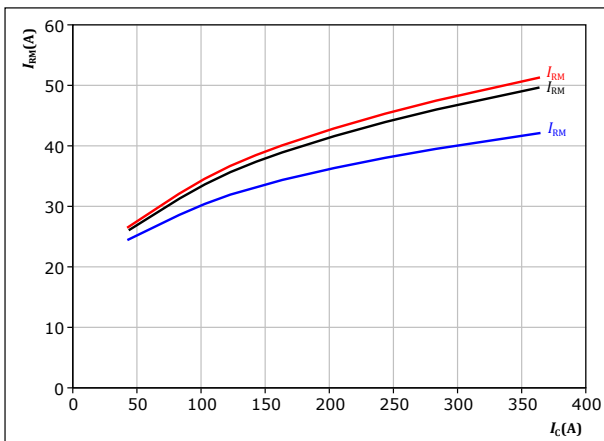

With an inductive load at


$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \ \Omega$

$T_j$ : — 25 °C  
— 125 °C  
— 150 °C

**figure 52.** FWD

Typical peak reverse recovery current as a function of IGBT turn on gate resistor

$$I_{RM} = f(R_{gon})$$

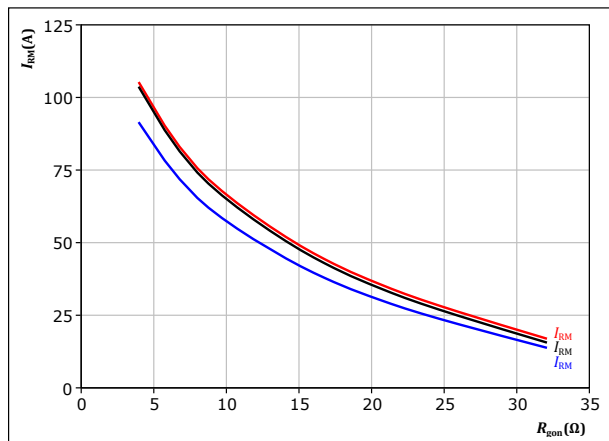

With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_c = 200 \text{ A}$


$T_j$ : — 25 °C  
— 125 °C  
— 150 °C



## Outer Boost Switching Characteristics

**figure 53.** FWD

Typical rate of fall of forward and reverse recovery current as a function of collector current  
 $di_f/dt, di_r/dt = f(I_C)$

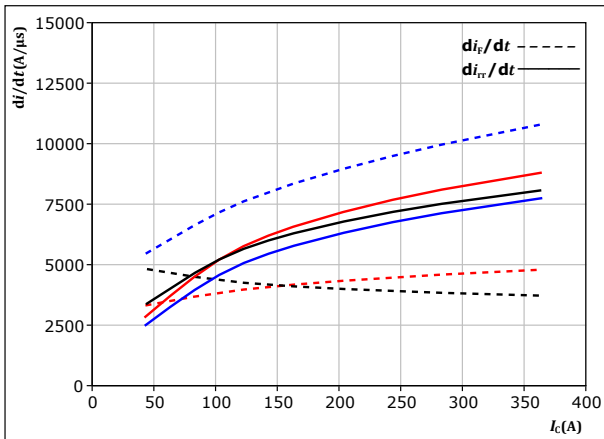


With an inductive load at

$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $R_{gon} = 16 \text{ } \Omega$

$T_j:$   
— 25 °C  
— 125 °C  
— 150 °C

**figure 54.** FWD

Typical rate of fall of forward and reverse recovery current as a function of turn on gate resistor  
 $di_f/dt, di_r/dt = f(R_{gon})$

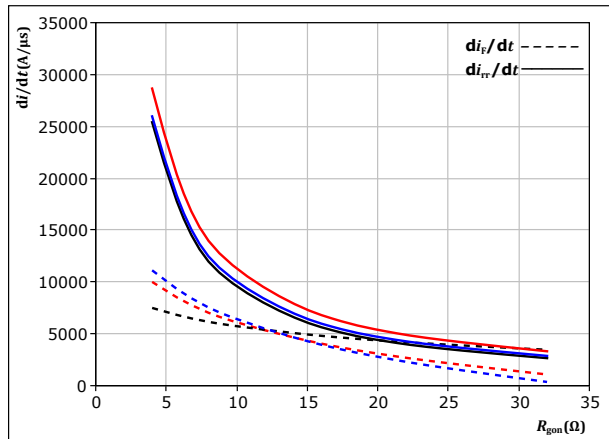

With an inductive load at


$V_{CE} = 700 \text{ V}$   
 $V_{GE} = \pm 15 \text{ V}$   
 $I_C = 200 \text{ A}$

$T_j:$   
— 25 °C  
— 125 °C  
— 150 °C

**figure 55.** IGBT

Reverse bias safe operating area

$I_C = f(V_{CE})$

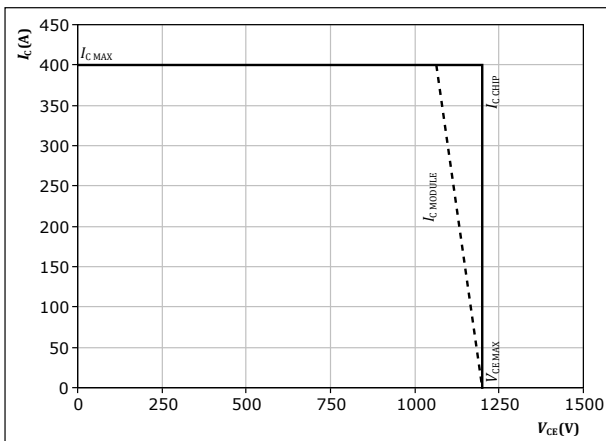

At  $T_j = 150 \text{ } ^\circ\text{C}$   
 $R_{gon} = 16 \text{ } \Omega$   
 $R_{goff} = 16 \text{ } \Omega$



## Switching Definitions

figure 56. IGBT

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

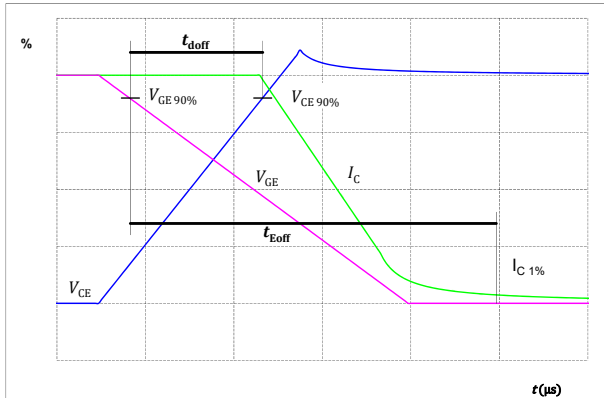


figure 57. IGBT

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

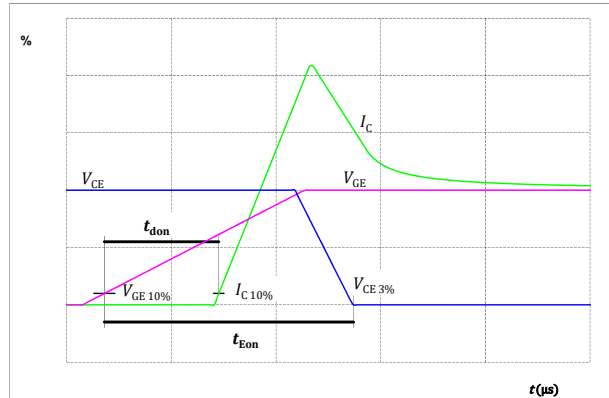


figure 58. IGBT

Turn-off Switching Waveforms & definition of  $t_f$


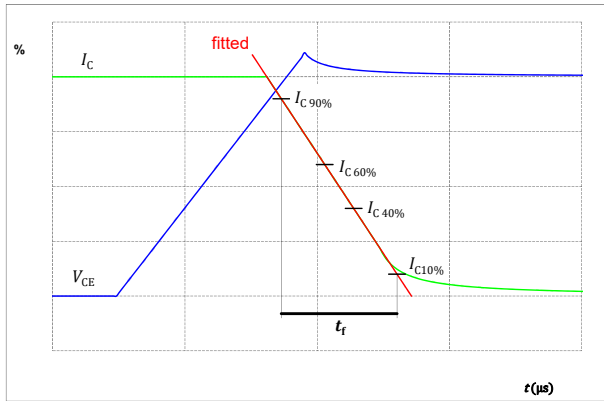


figure 59. IGBT

Turn-on Switching Waveforms & definition of  $t_r$



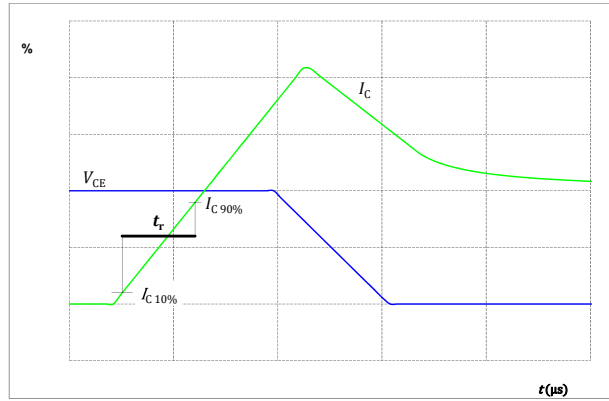

### Switching Definitions

figure 60. FWD

Turn-off Switching Waveforms & definition of  $t_{rr}$


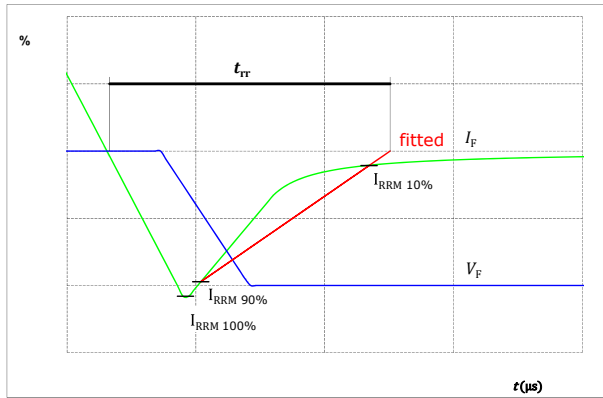


figure 61. FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )






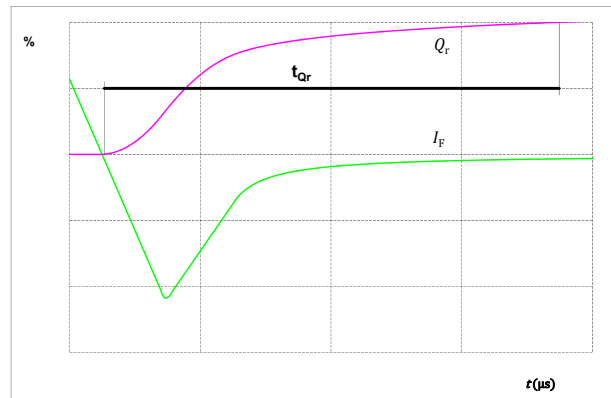



Vincotech

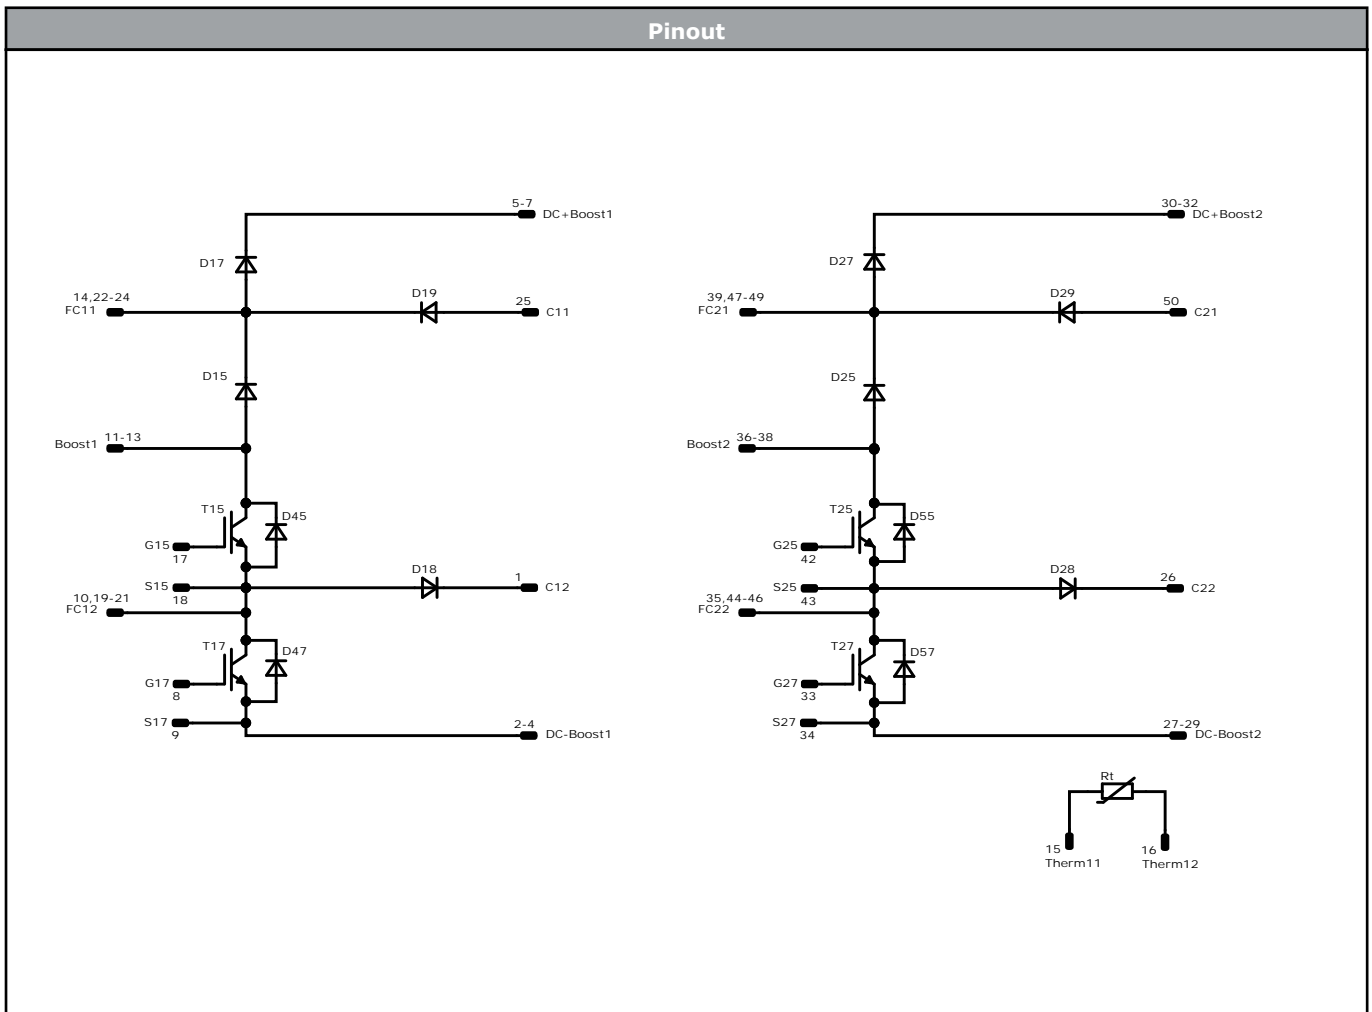

Identification					
ID	Component	Voltage	Current	Function	Comment
T15, T25	IGBT	1200 V	200 A	Inner Boost Switch	
D15, D25	FWD	1200 V	100 A	Inner Boost Diode	
D45, D55	Rectifier	1600 V	40 A	Inner Boost Sw. Protection Diode	
T17, T27	IGBT	1200 V	200 A	Outer Boost Switch	
D17, D27	FWD	1200 V	100 A	Outer Boost Diode	
D47, D57	Rectifier	1600 V	40 A	Outer Boost Sw. Protection Diode	
D19, D29	FWD	1200 V	75 A	Aux Diode H	
D18, D28	FWD	1200 V	75 A	Aux Diode L	
Rt	Thermistor			Thermistor	



Vincotech

Packaging instruction				
Standard packaging quantity (SPQ) 36	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 2</i> packages see vincotech.com website.

Package data
Package data for <i>flow 2</i> packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is UL 1557 recognized under E192116 up to a junction temperature under switching condition $T_{j,op}=175^{\circ}\text{C}$ and up to 4000VAC/1min isolation voltage. For more information see vincotech.com website.



Document No.:	Date:	Modification:	Pages
30-PT12B2A200H704-PK89L03T-D1-14	23 Jan. 2025	Initial Release	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.