



**flow90CON 1**

**1600 V / 39 A**

**Features**

- 3~ phase input rectifier
- Compatible with *flow* 90PACK 1
- Support designs with 90° mounting angle between heatsink and PCB
- Clip-in PCB mounting


**Target applications**

- Motor drives
- Servo drives


**Types**

- V23990-P717-H-PM

**flow90 1 housing**



**Schematic**





## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>Rectifier Diode</b>				
Peak repetitive reverse voltage	$V_{RRM}$		1600	V
Forward current (DC current)	$I_F$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	56	A
Surge (non-repetitive) forward current	$I_{FSM}$	Single Half Sine Wave, $t_p = 10\text{ ms}$ $T_j = 150\text{ °C}$	520	A
Surge current capability	$I^2t$		1350	A <sup>2</sup> s
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	73	W
Maximum junction temperature	$T_{jmax}$		150	°C

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	°C

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Creepage distance			>12,7	mm
Clearance			11,84	mm
Comparative Tracking Index	CTI		≥ 200	

\*100 % tested in production



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions						Values			Unit
		$V_{GE}$ [V]	$V_{GS}$ [V]	$V_{CE}$ [V]	$V_{DS}$ [V]	$I_C$ [A]	$I_D$ [A]	$T_j$ [°C]	Min	Typ	

#### Rectifier Diode

##### Static

Forward voltage	$V_F$				80	25 125 150		1,44 1,49	1,33 <sup>(1)</sup> 1,31 <sup>(1)</sup>	V
Reverse leakage current	$I_R$	$V_r = 1600$ V				25 150			20 1500	μA

##### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,96		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.



## Rectifier Diode Characteristics

figure 1. Rectifier

Typical forward characteristics

$$I_F = f(V_F)$$


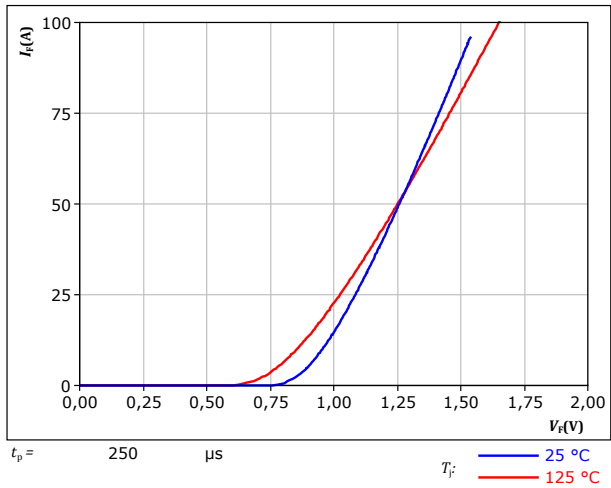


figure 2. Rectifier

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

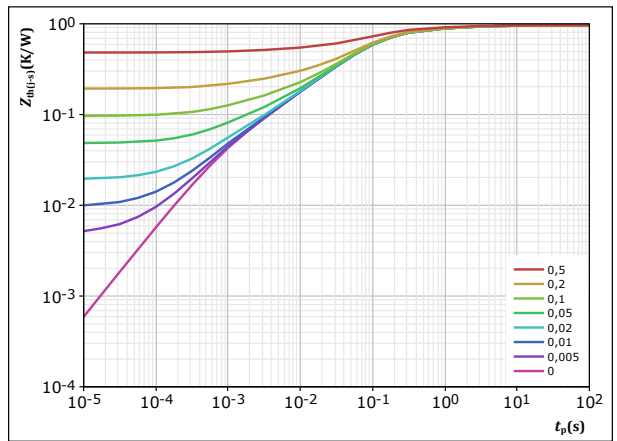

$D = t_p / T$

$R_{th(j-s)} = 0,965 \text{ K/W}$

Rectifier thermal model values

$R$ (K/W)	$\tau$ (s)
3,98E-02	7,88E+00
1,29E-01	8,64E-01
4,20E-01	1,32E-01
2,76E-01	4,24E-02
6,63E-02	5,80E-03
3,37E-02	8,90E-04



Vincotech


**V23990-P717-H-PM**  
datasheet

Ordering Code	
<b>Version</b>	<b>Ordering Code</b>
Without thermal paste	V23990-P717-H-PM
With thermal paste (3,4 W/mK, PSX-P7)	V23990-P717-H-/3/-PM

Marking							
	<b>Text</b>	<b>VIN</b> VIN	<b>Date code</b> WWYY	<b>Type&amp;Ver</b> TTTTTTV	<b>UL</b> UL	<b>Lot</b> LLLLL	<b>Serial</b> SSSS
	<b>Datamatrix</b>	<b>Type&amp;Ver</b>	<b>Lot number</b>	<b>Serial</b>	<b>Date code</b>		
		TTTTTTV	LLLLL	SSSS	WWYY		

Pin table [mm]				Function	Outline	
Pin	X	Y				
1	53	0		L3		
2	50,1	0		L3		
3	47,2	0		L3		
4	40,2	0		L1		
5	37,3	0		L1		
6	34,4	0		L1		
7	27,4	0		NA		
8	24,5	0		NA		
9	21,6	0		NA		
10	18,7	0		DC+		
11	15,8	0		DC+		
12	12,9	0		DC+		
13	7,1	0		NA		
14	0	0		NA		
15	0	7		NA		
16	3	7		NA		
17	7	7		DC-		
18	9,9	7		DC-		
19	12,8	7		DC-		
20	44	7		L2		
21	47	7		L2		
22	50	7		L2		

Tolerance of positions: ±0.5mm at the end of pins  
Dimension of coordinate axis is only offset without tolerance

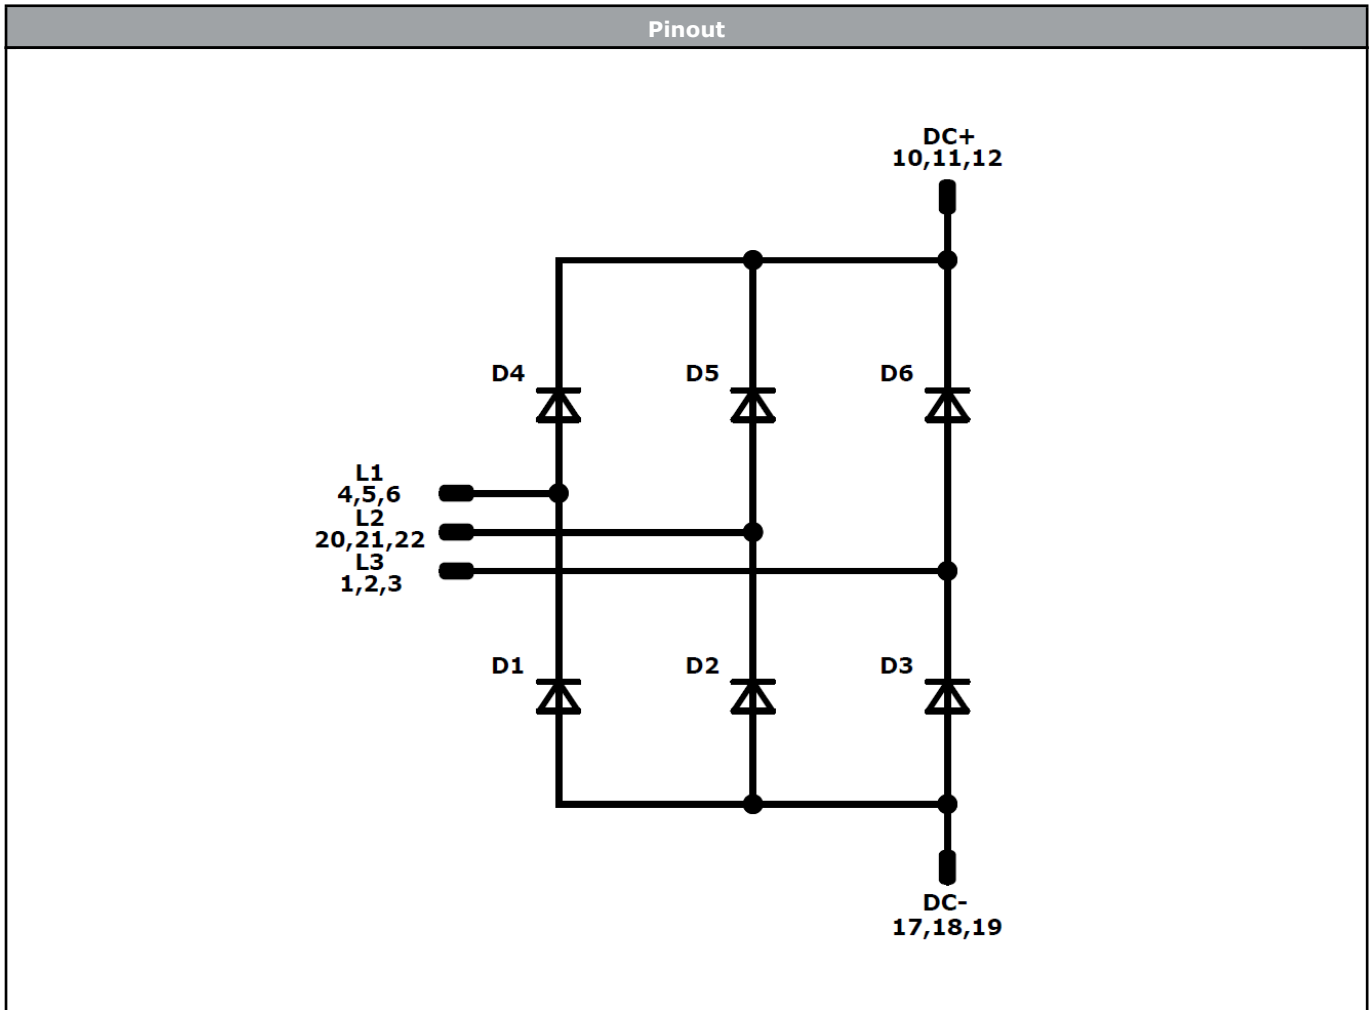

Identification					
ID	Component	Voltage	Current	Function	Comment
D1, D4, D2, D5, D3, D6	Rectifier	1600 V	42 A	Rectifier Diode	




Packaging instruction				
Standard packaging quantity (SPQ) 80	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow90</i> 1 packages see vincotech.com website.

Package data
Package data for <i>flow90</i> 1 packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
V23990-P717-H-PM-D5-14	30 Sep. 2021	Change of Isolation voltage Change of Rectifier Diode forward voltage condition Change of Rth value from P12 to PSX	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.